

2 Product Specifications

2-1 Specifications

Item	Description
LCD Panel	TFT-LCD panel, RGB vertical stripe, normally white transmissive, 15-Inch viewable, 0.297 (H) x 0.297 (V) mm pixel pitch
Scanning Frequency	Horizontal : 31 kHz ~ 60 kHz (Automatic) Vertical : 56 Hz ~ 75 Hz
Display Colors	16 M colors
Maximum Resolution	Horizontal : 1024 Pixels Vertical : 768 Pixels
Input Video Signal	Analog, 0.71 V _{p-p} ± 5% positive at 75 Ω ± 10% internally terminated
Input Sync Signal	Type : Separate H/V sync, Composite H/V Level : TTL level (V high ≥ 2.0 V, V low ≤ 0.8 V), Sync-on-Green (≤ -0.25 V)
Maximum Pixel Clock rate	80 MHz
Active Display Horizontal/Vertical	304.1 mm / 228.1 mm
AC power voltage & Frequency	AC 90 ~ 264 Volts, 60 / 50 Hz ± 3Hz 12V / 3A
Power Consumption	25W (normal)
Dimensions Unit (W x D x H) Carton (W x D x H) Package	13.9 x 2.2 x 11.0 Inches (353.5 x 57.0 x 280.5 mm) Without stand 13.9 x 5.9 x 13.6 Inches (353.5 x 151 x 345 mm) With stand attached 16.9 x 16.0 x 6.9 Inches (428 x 406 x 175 mm)
Weight (Net/Gross)	3.4 kg (7.5 lbs) / 4.0 kg (8.8 lbs)
Environmental Considerations	Operating Temperature : 50°F ~ 104°F (10°C ~ 40°C) Operating Humidity : 10 % ~ 80 % Storage Temperature : -13°F ~ 113°F (-25°C ~ 45°C) Storage Humidity : 5 % ~ 95 %
<ul style="list-style-type: none"> • GY15CS* complies with SWEDAC (MPRII) recommendations for reduced electromagnetic fields. • Designs and specifications are subject to change without prior notice. 	

2-2 Pin Assignments



Pin No.	Sync Type	15-Pin D-Sub Signal Cable Connector		
		Separate	Composite	Sync-on-green
1		Red	Red	Red
2		Green	Green	Green + H/V Sync.
3		Blue	Blue	Blue
4		GND	GND	GND
5		DDC Return (GND)	DDC Return (GND)	DDC Return (GND)
6		GND-R	GND-R	GND-R
7		GND-G	GND-G	GND-G
8		GND-B	GND-B	GND-B
9		DDC Power Input (+5V)	DDC Power Input (+5V)	DDC Power Input (+5V)
10		Self Raster	Self Raster	Self Raster
11		GND	GND	GND
12		Bi-Dr Data (SDA)	Bi-Dr Data (SDA)	Bi-Dr Data (SDA)
13		H-Sync.	H/V-Sync.	Not Used
14		V-Sync.	Not Used	Not Used
15		DDC Clock (SCL)	DDC Clock (SCL)	DDC Clock (SCL)

2-3 Timing Chart

This section of the service manual describes the timing that the computer industry recognizes as standard for computer-generated video signals.

Table 2-1 Timing Chart

Mode Timing	IBM		VESA				
	VGA2/ 70 Hz 720 x 400	VGA3/ 60 Hz 640 x 480	640/75 Hz 640 x 480	800/60 Hz 800 x 600	800/75 Hz 800 x 600	1024/60 Hz 1024 x 768	1024/75 Hz 1024 x 768
fH (kHz)	31.469	31.469	37.500	37.879	46.875	48.363	60.023
A μ sec	31.777	31.778	26.667	26.400	21.333	20.677	16.660
B μ sec	3.813	3.813	2.032	3.200	1.616	2.092	1.219
C μ sec	1.589	1.589	3.810	2.200	3.232	2.462	2.235
D μ sec	26.058	26.058	20.317	20.000	16.162	15.754	13.003
E μ sec	0.318	0.318	0.508	0.000	0.323	0.369	0.203
fV (Hz)	70.087	59.940	75.000	60.317	75.000	60.004	75.029
O msec	14.268	16.683	13.333	16.579	13.333	16.666	13.328
P msec	0.064	0.064	0.080	0.106	0.064	0.124	0.050
Q msec	0.858	0.794	0.427	0.607	0.448	0.600	0.466
R msec	13.155	15.761	12.800	15.840	12.800	15.880	12.795
S msec	0.191	0.064	0.027	0.0261	0.021	0.062	0.017
Clock Freq. (MHz)	28.322	26.175	31.500	40.000	49.500	75.000	78.750
Polarity H.Sync	Negative	Negative	Negative	Positive	Positive	Negative	Positive
V.Sync	Positive	Negative	Negative	Positive	Positive	Negative	Positive
Remark	Separate	Separate	Separate	Separate	Separate	Separate	Separate

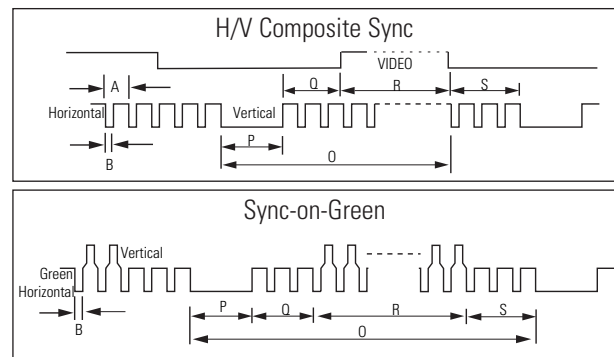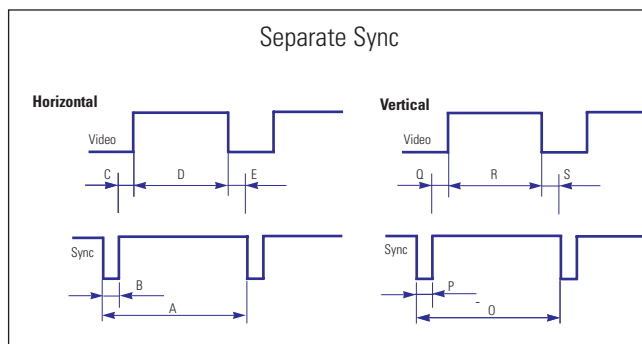

A : Line time total

B : Horizontal sync width

C : Back porch

D : Active time

E : Front porch

O : Frame time total

P : Vertical sync width

Q : Back porch

R : Active time

S : Front porch

Memo